



400 V, 3-phase, 16A slow,
Cable Area min 2,5 mm²

BUITENMAAT LIFTSCHACHT

400 V, 3-phase, 16A slow,
Cable Area min 2,5 mm²

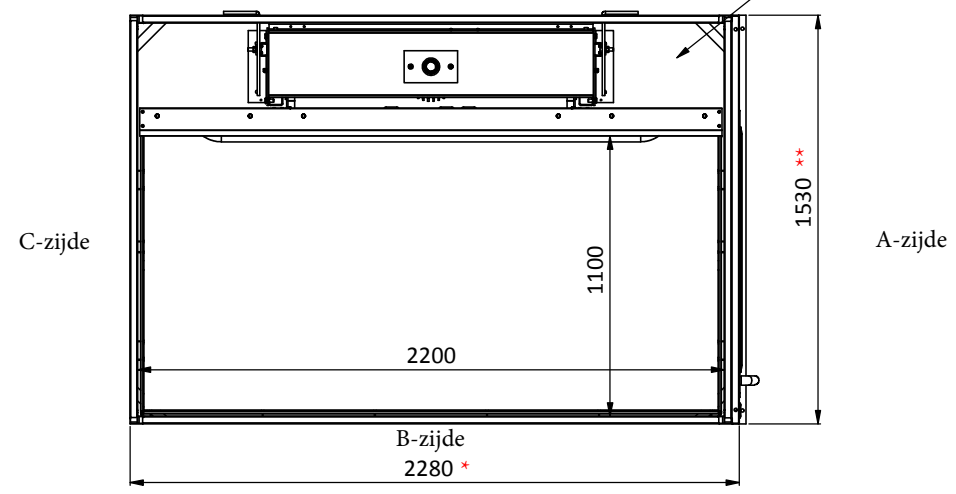

SPARINGSMATEN

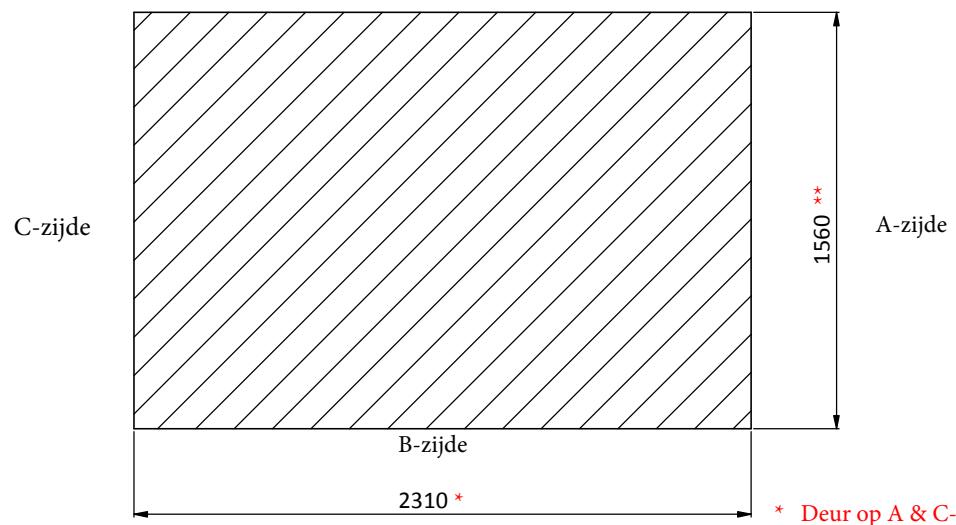

* Deur op A & C-zijde, +30mm
** Deur op B-zijde, +30mm



Product	A-1000			
Principal drawing 1100x2200				
				-Revision
				-00