



400 V, 3-phase, 16A slow,
Cable Area min 2,5 mm2

400 V, 3-phase, 16A slow,
Cable Area min 2,5 mm2

BUITENMAAT LIFTSCHACHT

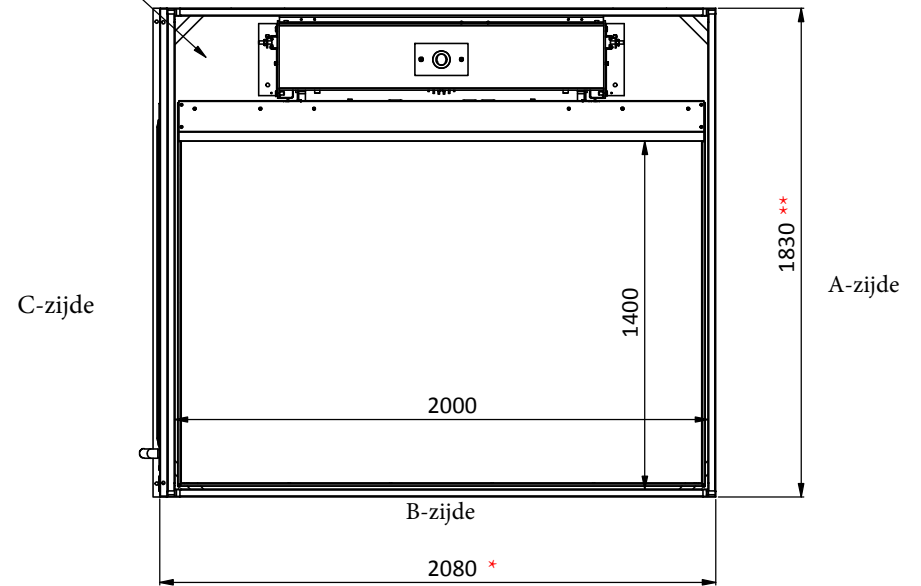

SPARINGSMATEN

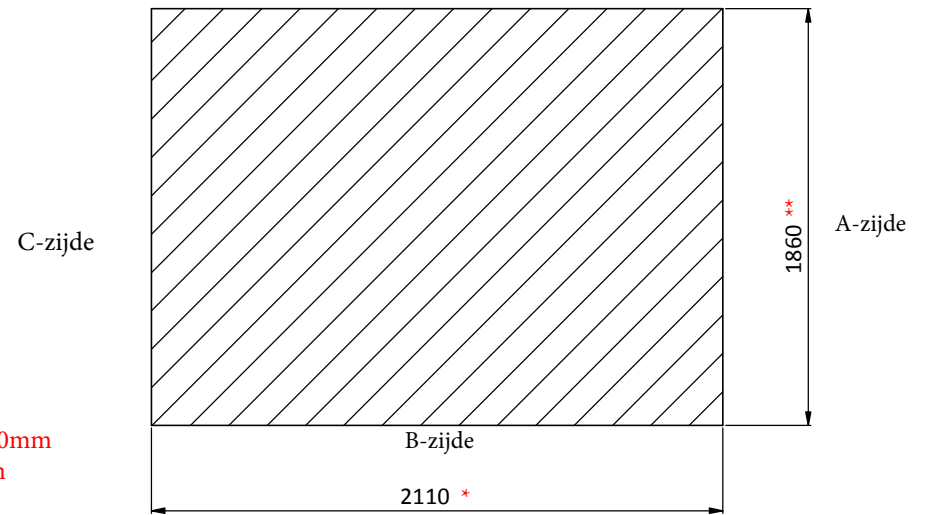

* Deur op A & C-zijde, +30mm

** Deur op B-zijde, +30mm



Product	A-1000			
Title	Principal drawing 1400x2000			
Document Number				
-Revision				-00